


# PPSS 球头柱塞 - 插入型

SUS 不锈钢



● 材质、表面处理

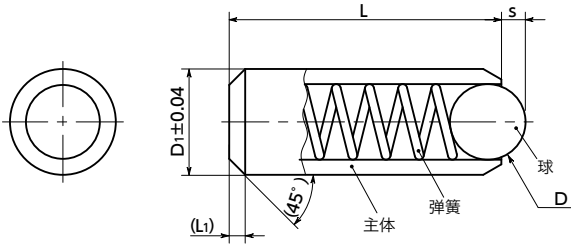

	PPSS	PPSS-S
主体	SUS303	SUS303
球	SUS420C, 淬火	SUS420C, 淬火
弹簧	SUS631J1	SUS631J1

- 插入型球头柱塞。
- 安装孔的推荐尺寸公差为F8。
- 可根据产品符号载荷类型。

产品符号	载荷类型
PPSS	轻载
PPSS-S	重载

⚠ 使用注意事项  
插入型柱塞。

如果以压入方式安装,可能会造成损坏。  
请根据用途使用粘接剂等进行固定。

PPSS 轻载 PPSS-S 重载

单位: mm

型号	D1	L	s	D	L1	适用的球型按钮 BB → P.xxxx	载荷 (N) min./max.	质量 (g)
PPSS-2	2	3.5	0.3	1	0.15	-	0.8 / 1.5	0.1
PPSS-2.5	2.5	5	0.4	1.5	0.15	-	2.8 / 4.7	0.2
PPSS-3	3	7	0.65	2	0.15	BB-4	4.5 / 7.5	0.3
PPSS-3.5	3.5	9	0.8	2.5	0.15	BB-5	6 / 14.5	0.5
PPSS-4	4	11	0.9	3	0.25	BB-5	8 / 14	0.7
PPSS-4.5	4.5	12	0.95	3.2	0.25	BB-5	9.5 / 16.5	0.9
PPSS-5	5	13	1	3.5	0.25	BB-6	11 / 18	1.3
PPSS-5.5	5.5	14	1.2	4	0.3	BB-8	15.5 / 25	1.6
PPSS-6	6	15	1.5	4.5	0.3	BB-8	18 / 31	1.9
PPSS-8	8	18	2	6	0.3	BB-10	24 / 45	6
PPSS-10	10	20	2.5	8	0.5	BB-12	26 / 49	9
PPSS-12	12	22	3.5	10	0.5	BB-16	41 / 86	13
PPSS-2-S	2	3.5	0.3	1	0.15	-	1.3 / 2.2	0.1
PPSS-2.5-S	2.5	5	0.4	1.5	0.15	-	4.7 / 7.1	0.2
PPSS-3-S	3	7	0.65	2	0.15	BB-4	7.8 / 11.6	0.3
PPSS-3.5-S	3.5	9	0.8	2.5	0.15	BB-5	12 / 18	0.5
PPSS-4-S	4	11	0.9	3	0.25	BB-5	15 / 22	0.8
PPSS-4.5-S	4.5	12	0.95	3.2	0.25	BB-5	18.7 / 25.1	1
PPSS-5-S	5	13	1	3.5	0.25	BB-6	19.3 / 26.6	1.5
PPSS-5.5-S	5.5	14	1.2	4	0.3	BB-8	25.1 / 39.2	2
PPSS-6-S	6	15	1.5	4.5	0.3	BB-8	36 / 60.5	3
PPSS-8-S	8	18	2	6	0.3	BB-10	57 / 103.5	6
PPSS-10-S	10	20	2.5	8	0.5	BB-12	61 / 110	9
PPSS-12-S	12	22	3.5	10	0.5	BB-16	68 / 143	14

● 相关产品

支承侧请使用耐磨损性优良的球形按钮 [BB]。  
→ P.xxxx



● 型号指定

**PPSS-5**



无尘洗净·无尘包装 → P.xxxx  
不可对应

防松动 → P.xxxx  
不可对应

激光刻印 → P.xxxx  
不可对应